

کوثر شیمی

Kosar Shimi

+9821 - 43462000

info@kosar.co

www.kosar.co

CP 430

Vinyl Chloride and Vinyl Acetate Copolymer

Product Description

CP-430 is a low molecular weight copolymer comprised of approximately 85% vinyl chloride and 15% of vinyl acetate. It is supplied as a powder.

Applications

Typical application for CP-430 :

- Adhesives
- Printing Inks
- Industrial Coatings
- Over Lacquers

Properties

Properties	Unit	Value	Test methods
Molecular weight (Mw)	-	48,200	GPC
Degree of polymerization	-	450±50	JIS K-6720-2
K-value	-	50	-
VAM content	wt%	15 ± 1	Hanwha -method
Bulk Density	g/cm ³	0.77 ± 0.07	JIS K-6720-2
Volatile content	%	Max 4.0	JIS K-6720-2
Glass transition temperature (Tg)	°C	-71	DSC
Particle size distribution	%	100	42mesh pass
Viscosity (MEK/Tol=1/1) •Resin 10% •Resin 20% •Resin 30%	cPs	8 40 268	Brockfield Viscometer

Processing

CP-430 is the solution vinyl resin which is distinguished for the solubility with various kinds of organic solvent. It has good resistance for abrasion, water and chemical variation. It also has good adhesive strength and stability for storage in low temperature. And it shows good surface gloss as it has good dispersibility of pigment. Ketone type such as cyclohexanone, MEK and MIBK is suitable for its solvent, and some aromatic hydrocarbon type like toluene and xylene can be used for the diluent. Beyond them, butyl acetate or ethyl acetate (ester type) can be used for the solvent,

The information given herein and other otherwise supplied to users is based on our general experience and where applicable, on the results of tests on samples of typical manufacture. However, because of the many factors which are outside knowledge and control, which can effect the use of these products, users must rely on their own judgment and we cannot accept liability for any injury, loss or damage resulting from reliance upon such information.

کوثر شیمی

Kosar Shimi
+9821 - 43462000
info@kosar.co
www.kosar.co

but it is required to increase the solving temperature or to mix with ketone type since its solubility is inferior to that of the ketone type.


Some plasticizer is suggested to be used for increasing the flexibility of film. CP-430 exhibits excellent properties being used with various kinds of plasticizers such as phthalates or adipates.

CP-430 can be used by blending with acrylic, ketone and epoxy resin as well as other vinyl resin since it suits with them very much.

Formulation

Material	Gravure(%)	Screen(%)	Paint for Toy(%)	Leather Coating(%)
CP-430	20	27	25	30
MEK(Methyl ethyl ketone)	40		38	35
Cyclohexanone		36		
Toluene or Xylene	40	37	37	35
Plasticizer	2~4			
Pigment	2~25			

Solution Viscosity

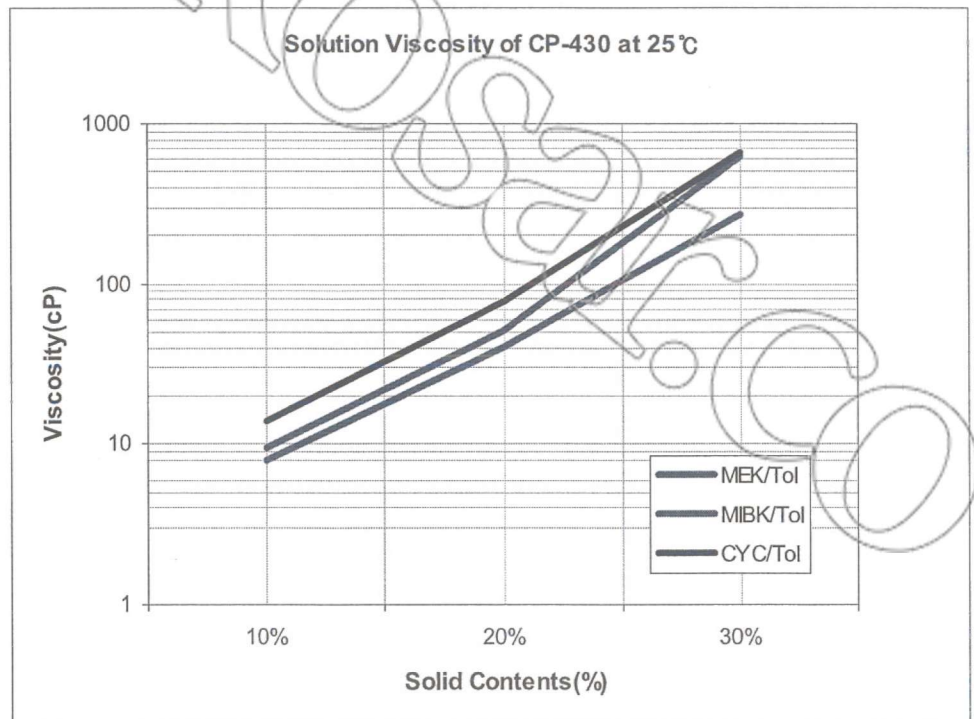

The information given herein and other otherwise supplied to users is based on our general experience and where applicable, on the results of tests on samples of typical manufacture. However, because of the many factors which are outside knowledge and control, which can effect the use of these products, users must rely on their own judgment and we cannot accept liability for any injury, loss or damage resulting from reliance upon such information.

Storage

Store CP-430 under dry conditions and at room temperature below 25°C. Under these conditions, the product has a shelf life of at least one year, from the delivery date. If the material is kept beyond the recommended shelf life, it is not necessarily unusable, but the user should perform a quality control on the properties relevant to the application. The properties determined in our prerelease quality control may change during storage, depending on storage conditions, and deviate from the specification.

Safety and Handling

The Hanwha Chemical Corporation provides its customers with a product specific Material Safety Data Sheet (MSDS) to cover potential health effects, safe handling, use and transportation. Hanwha Chemical Corporation strongly encourage its customers to review MSDS on its products and other materials prior to their use.

CP-430 is normally supplied as a power in 25kg polypropylene inner coated paper bag or 500kg Flecon Bag.

CP-430 is not formulated to contain any hazardous or regulated materials such as lead, cadmium, mercury, and chromium compounds. And Hanwha Chemical corporation guarantee that CP-430 do not include any hazardous or regulated materials during the manufacturing process.

Properties

Further information and recommendations for processing can be obtained from our technical support staff and representatives.

The data and recommendations contained in this brochure represent the current state of our knowledge and serve as a guide only to our products and their potential applications. Therefore, no warranty of specific properties of the products mentioned herein nor of their suitability or fitness for a particular purpose is implied.

The information given in this brochure should be checked by preliminary trials because of conditions during processing over which we have no control.

کوثر شیمی
Kosar Shimi
+9821 - 43462000
info@kosar.co
www.kosar.co